




KEEN PUMP CO.™

Section
Date

ENCLOSED
JANUARY 2013

Pump Series	K6VL		6" SUBMERSIBLE SEWAGE PUMPS		
Speed	1150 RPM	Discharge	6"	Solids	3"


GPM: _____ TDH: _____

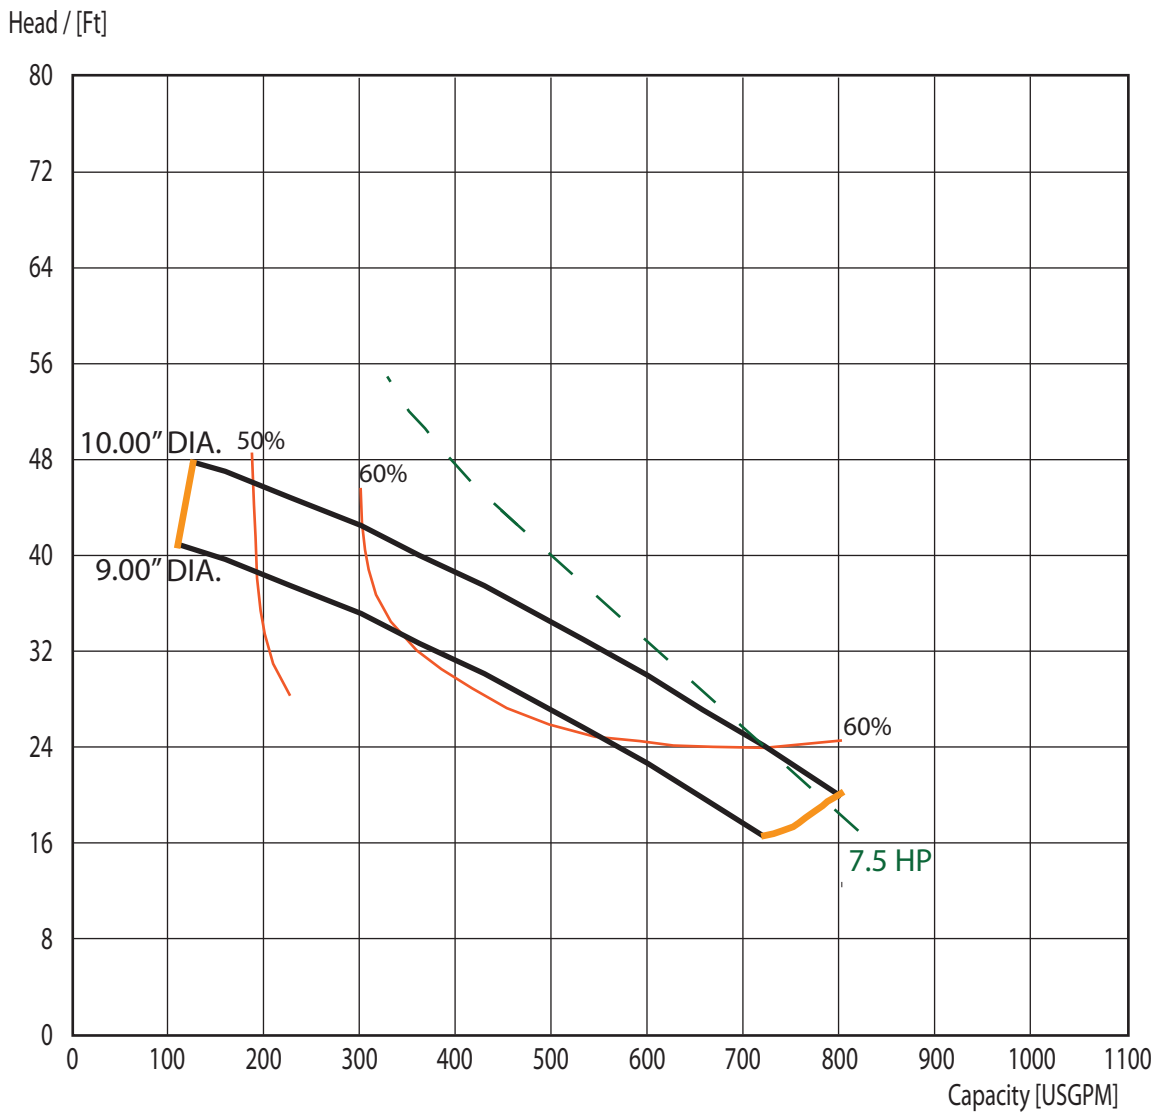

The curves reflect maximum performance characteristics without exceeding full load. Operation is recommended in the bounded area with operational point within the curve limit. Performance curves are based on actual tests with clear water at 70° F and 1280 feet site elevation.

Feet x .305 = Meters
 Inches x 25.4 = Millimeters
 GPM x .227 = Cubic Meters/Hour
 GPM x 3.785 = Liters/Minute
 HP x .746 = KW

SPEED	IMPELLER DIA.	STYLE	SOLIDS DIA.	SUCTION	DISCHARGE	NO. VANES
1750	VARIOUS	ENCLOSED	3-1/4"	6"	6"	2

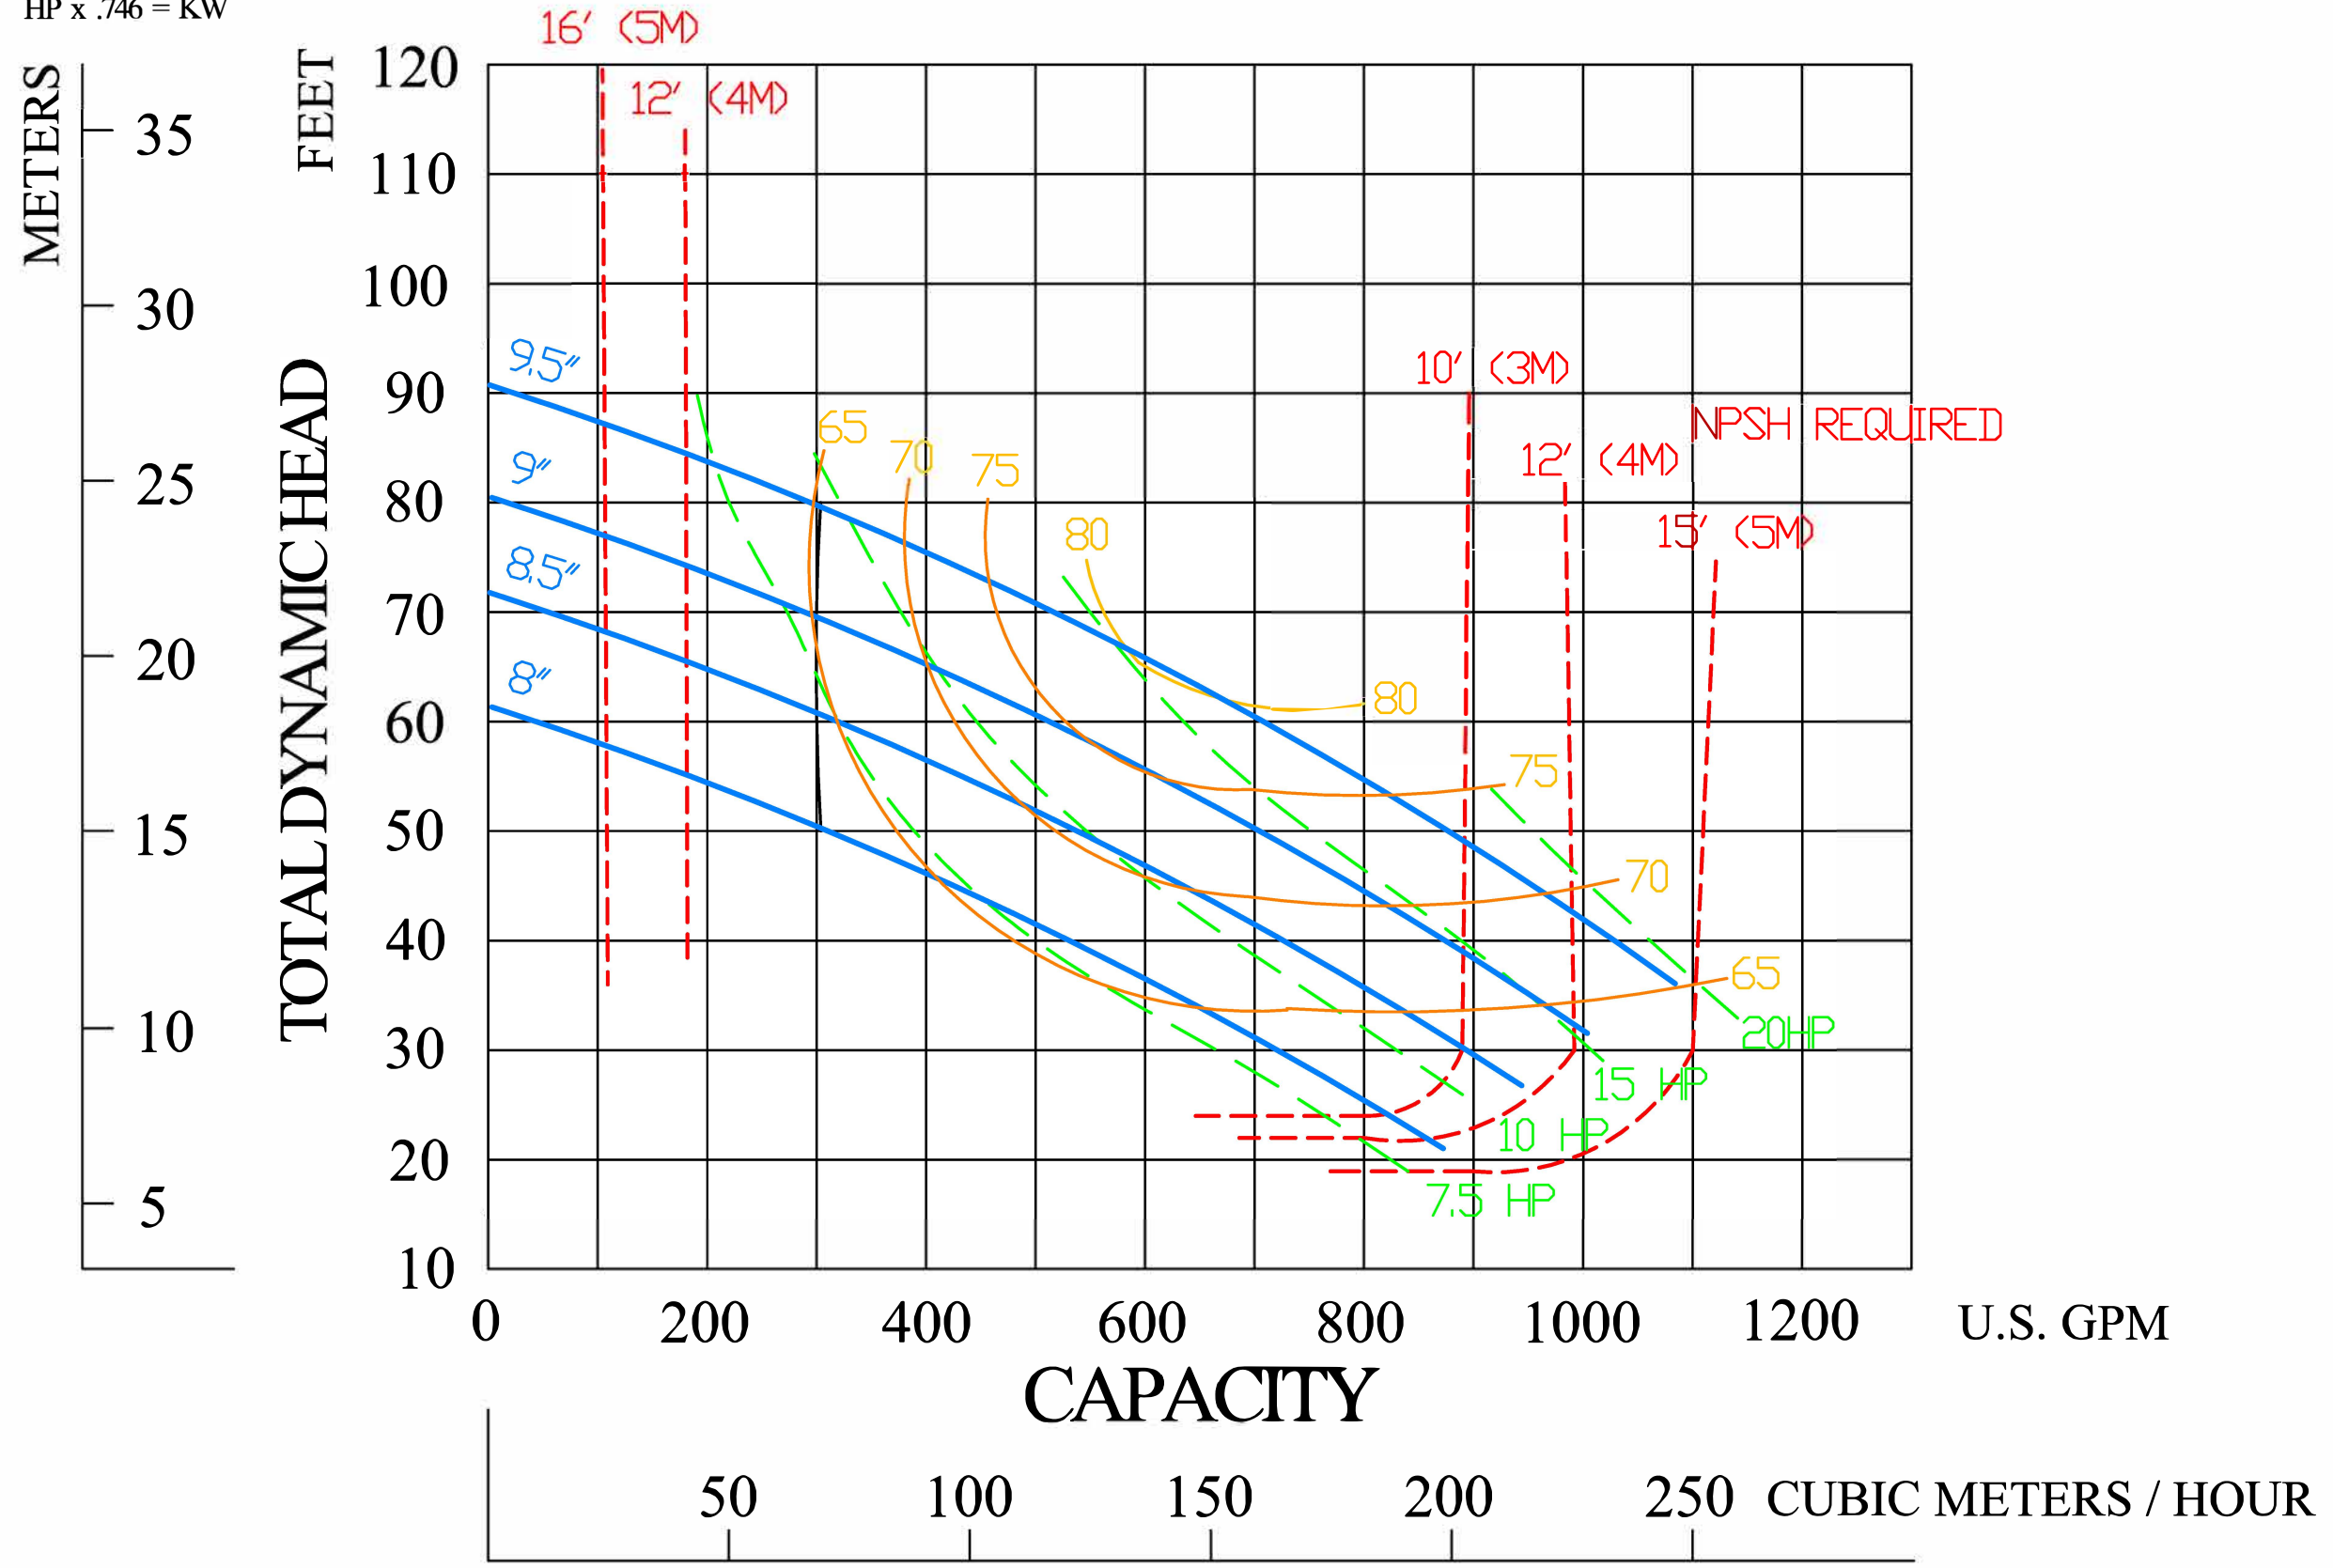

KEEN PUMP COMPANY • ASHLAND, OHIO

K6VL-1750 RPM