




Section  
Date

**GRINDER**  
JAN 2016

|             |                 |           |                       |                  |
|-------------|-----------------|-----------|-----------------------|------------------|
| Pump Series | <b>KHHG2</b>    |           | 2HP RECESSED IMPELLER |                  |
| Speed       | <b>3450 RPM</b> | Discharge | 1-1/4"                | <b>HIGH FLOW</b> |

GPM: \_\_\_\_\_ TDH: \_\_\_\_\_

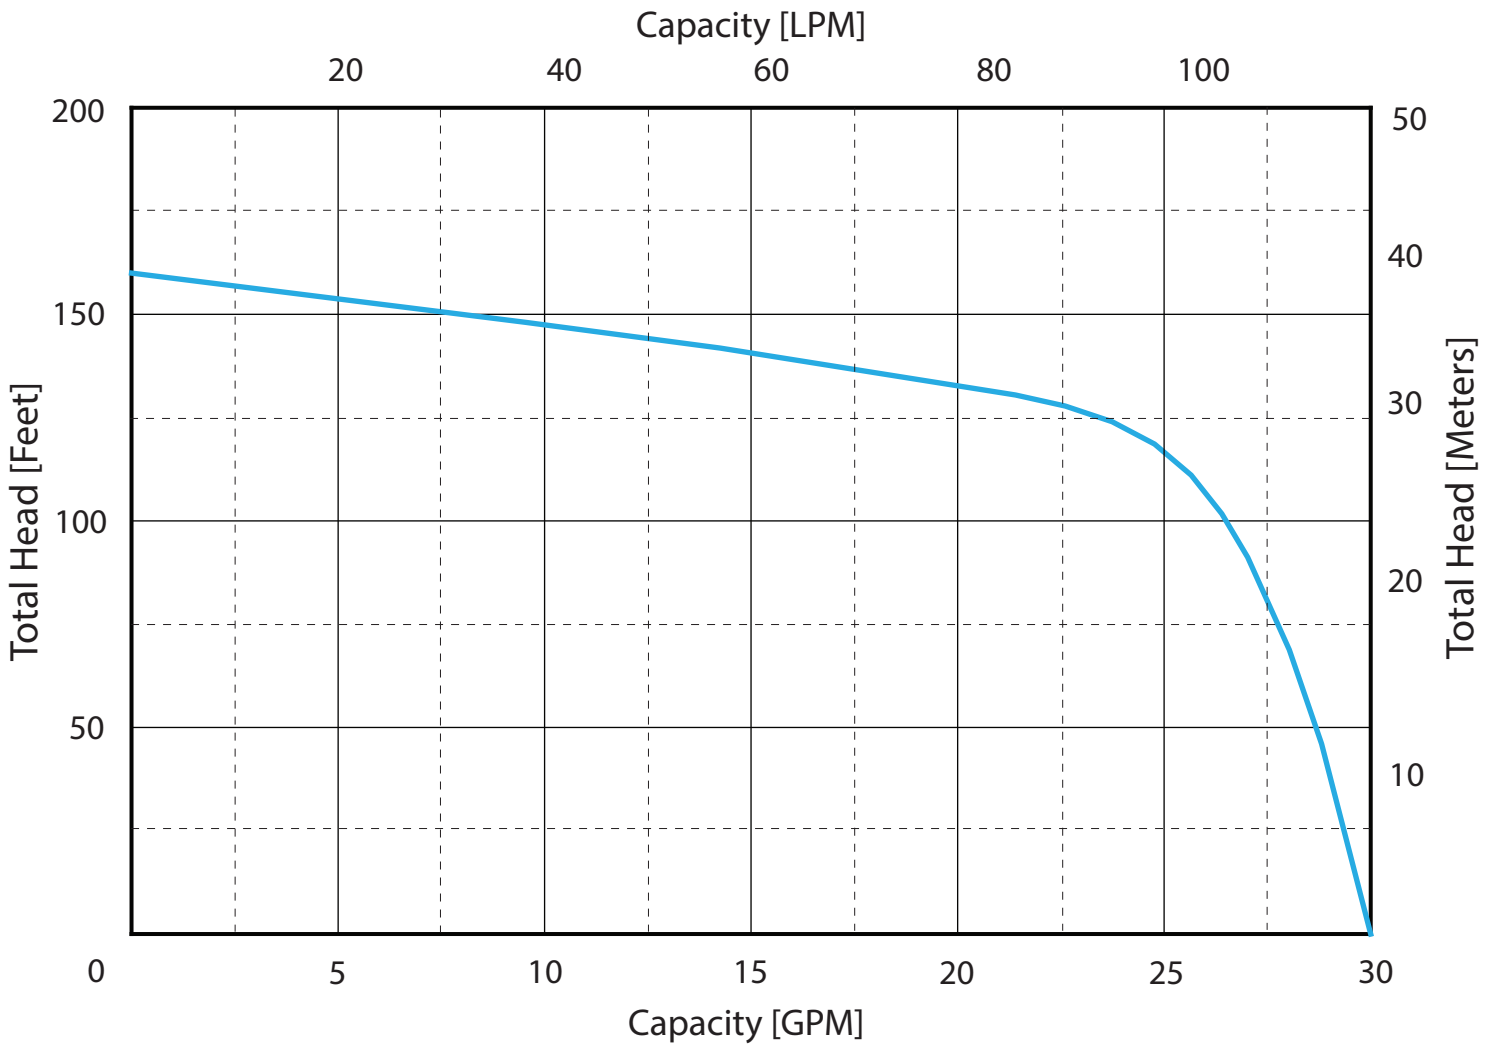

The curves reflect maximum performance characteristics without exceeding full load. Operation is recommended in the bounded area with operational point within the curve limit. Performance curves are based on actual tests with clear water at 70° F and 1280 feet site elevation.




Section  
Date

**GRINDER**  
JAN 2016

|             |                 |           |                       |                  |
|-------------|-----------------|-----------|-----------------------|------------------|
| Pump Series | <b>KHHG2H</b>   |           | 2HP RECESSED IMPELLER |                  |
| Speed       | <b>3450 RPM</b> | Discharge | 1-1/4"                | <b>HIGH HEAD</b> |

GPM: \_\_\_\_\_ TDH: \_\_\_\_\_

**\* Consult factory for heads below 50' TDH**

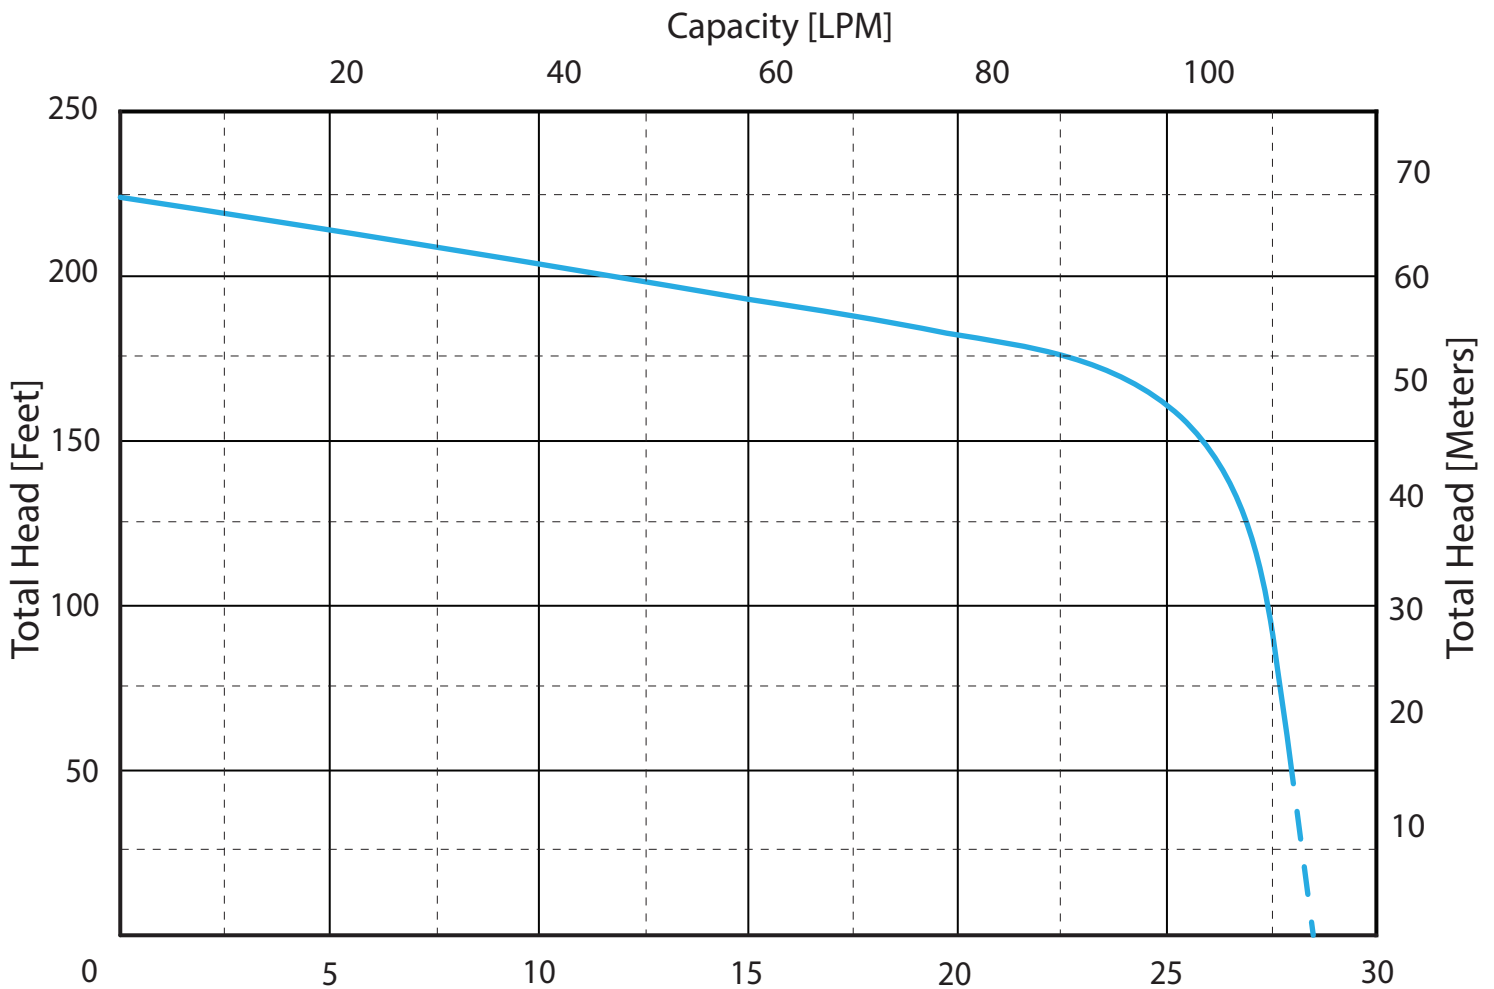

The curves reflect maximum performance characteristics without exceeding full load.  
Operation is recommended in the bounded area with operational point within the curve limit.  
Performance curves are based on actual tests with clear water at 70° F and 1280 feet site elevation.