




Section
Date

ENCLOSED
APRIL 2013

Pump Series	K8VK		8" SUBMERSIBLE SEWAGE PUMPS		
Speed	870 RPM	Discharge	8"	Solids	4"

GPM: _____ TDH: _____

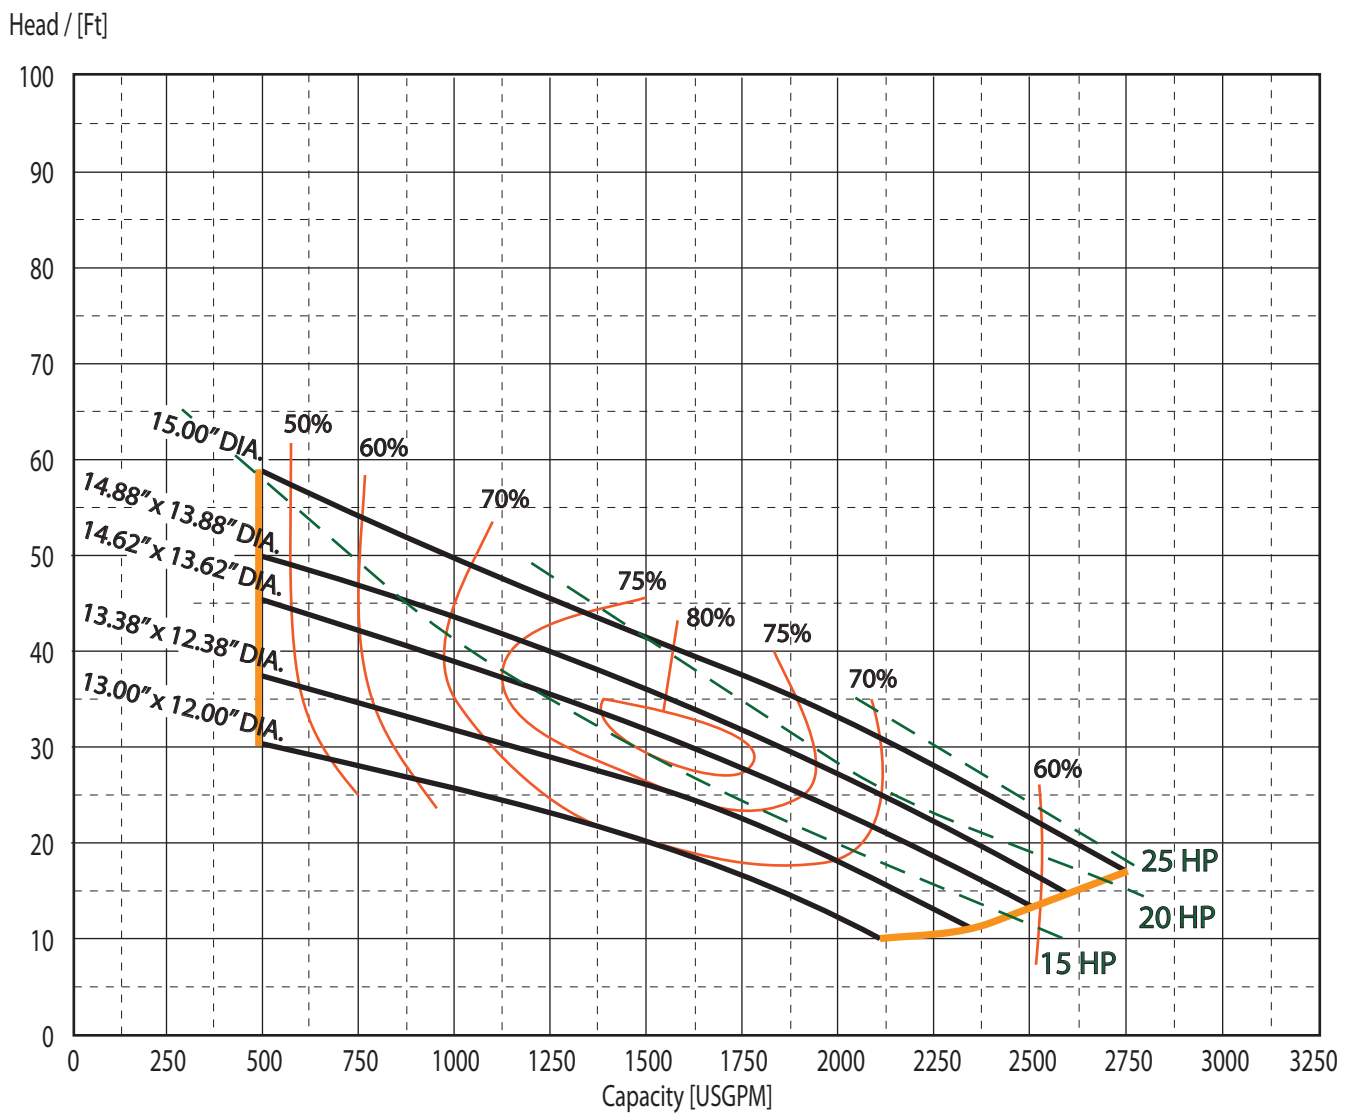

The curves reflect maximum performance characteristics without exceeding full load.
Operation is recommended in the bounded area with operational point within the curve limit.
Performance curves are based on actual tests with clear water at 70° F and 1280 feet site elevation.




Section
Date

ENCLOSED
APRIL 2013

Pump Series	K8VK		8" SUBMERSIBLE SEWAGE PUMPS		
Speed	1150 RPM	Discharge	8"	Solids	4"

GPM: _____ TDH: _____

Head / [Ft]

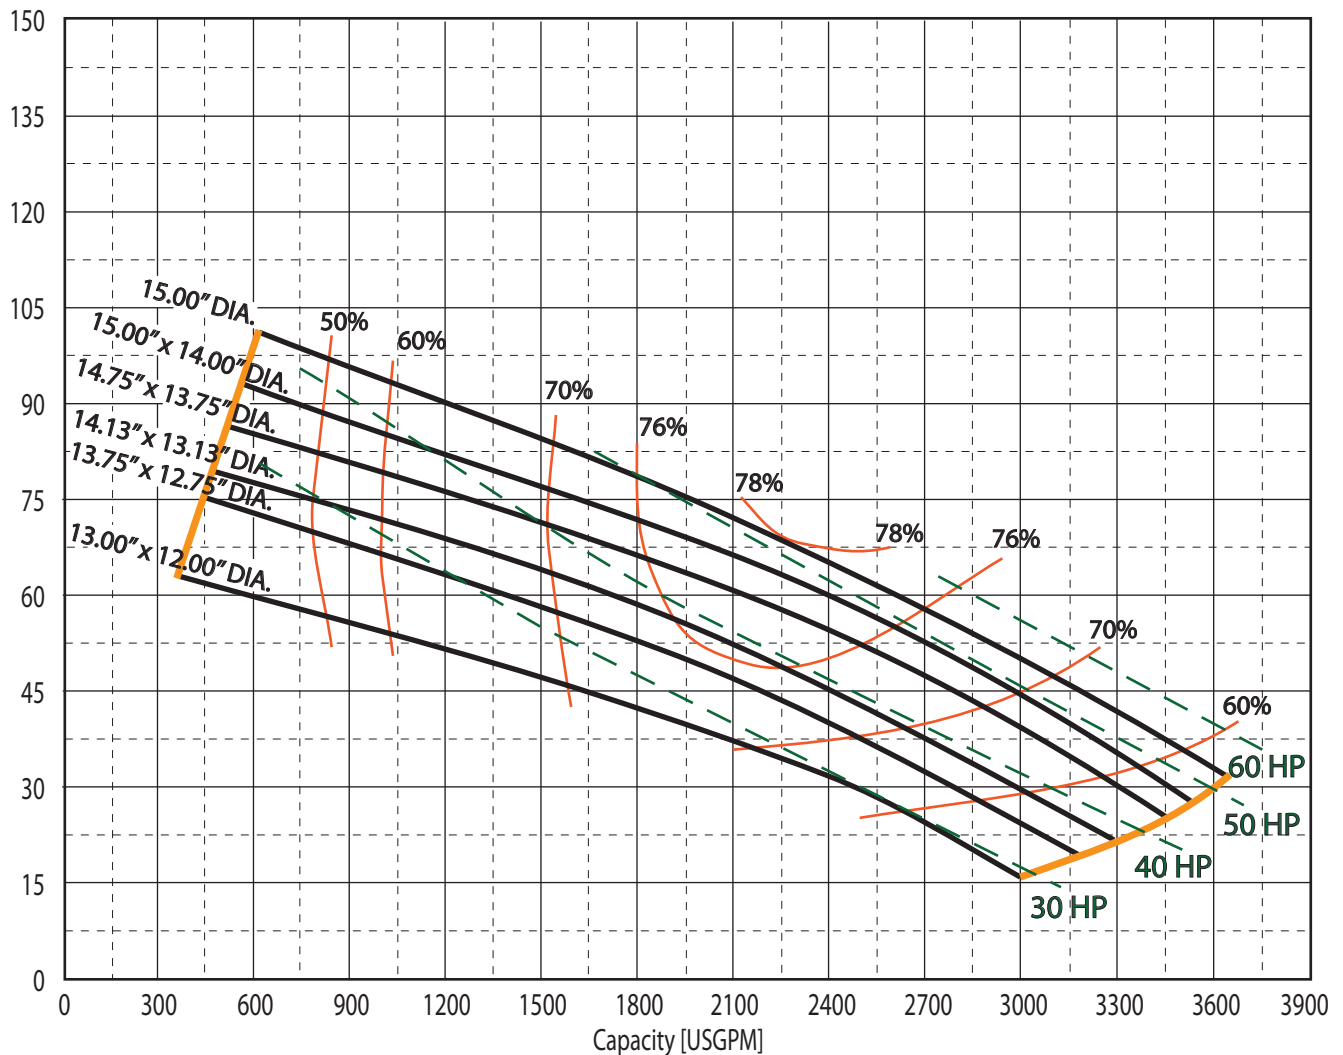

The curves reflect maximum performance characteristics without exceeding full load.
 Operation is recommended in the bounded area with operational point within the curve limit.
 Performance curves are based on actual tests with clear water at 70° F and 1280 feet site elevation.




Section
Date

ENCLOSED
APRIL 2013

Pump Series	K8VK		8" SUBMERSIBLE SEWAGE PUMPS		
Speed	1750 RPM	Discharge	8"	Solids	4"

GPM: _____ TDH: _____

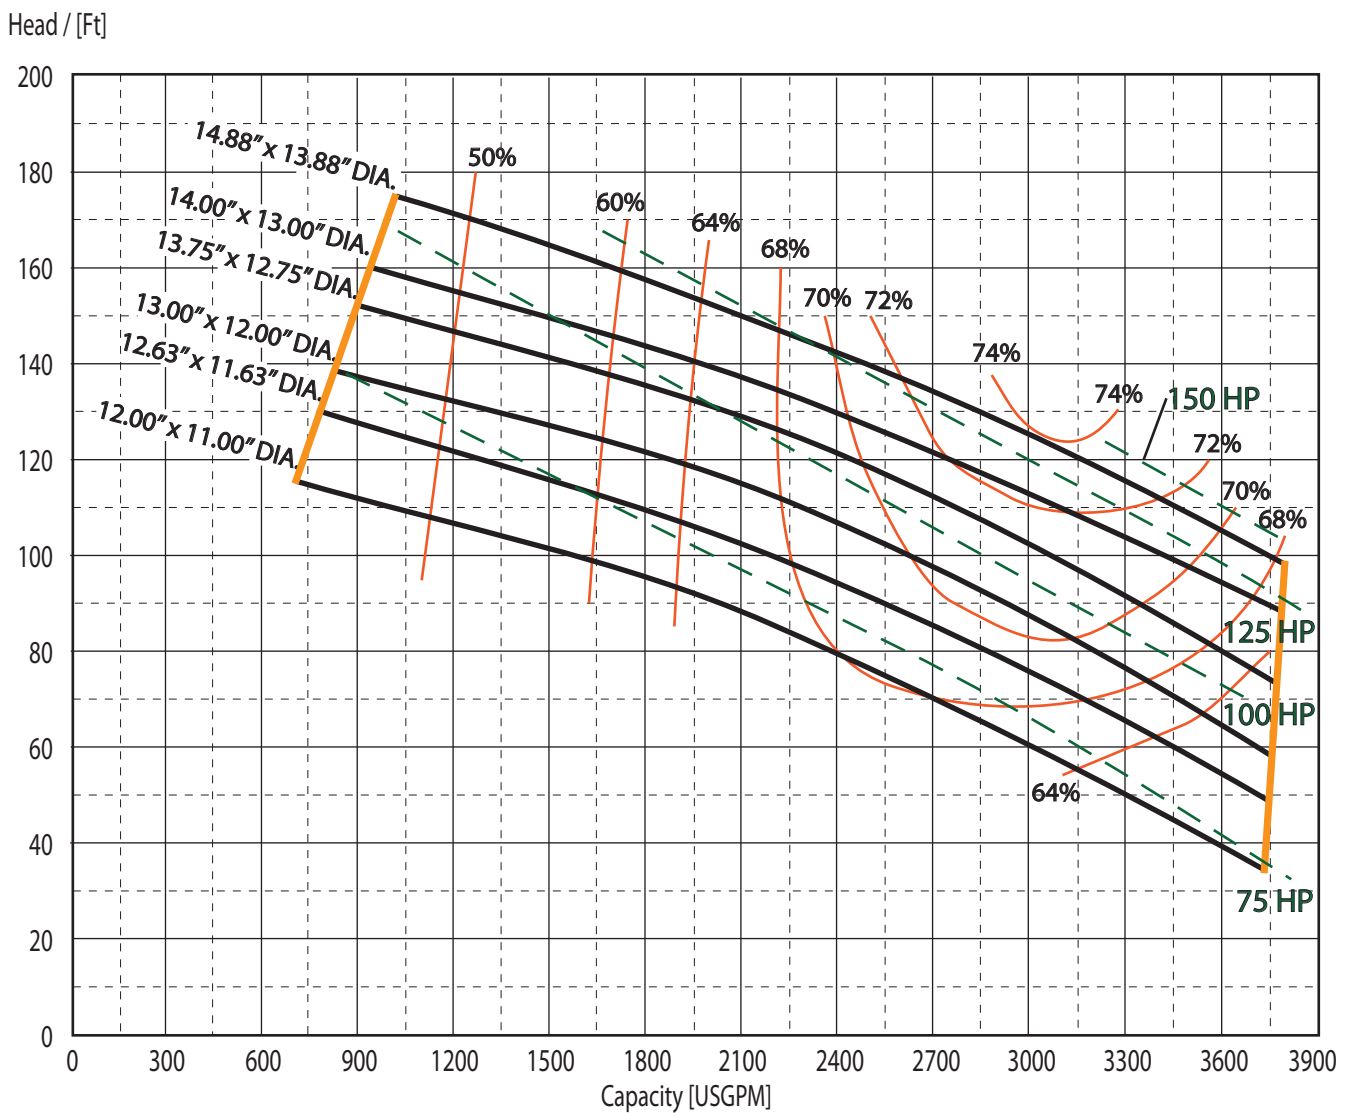

The curves reflect maximum performance characteristics without exceeding full load.
 Operation is recommended in the bounded area with operational point within the curve limit.
 Performance curves are based on actual tests with clear water at 70° F and 1280 feet site elevation.