




Section
Date

GRINDER
FEB 2017

Pump Series	KG2-CSL		2HP RECESSED IMPELLER (5.35" Dia.)	
Speed	3450 RPM	Discharge	1-1/4"	STANDARD FLOW

GPM: _____ TDH: _____

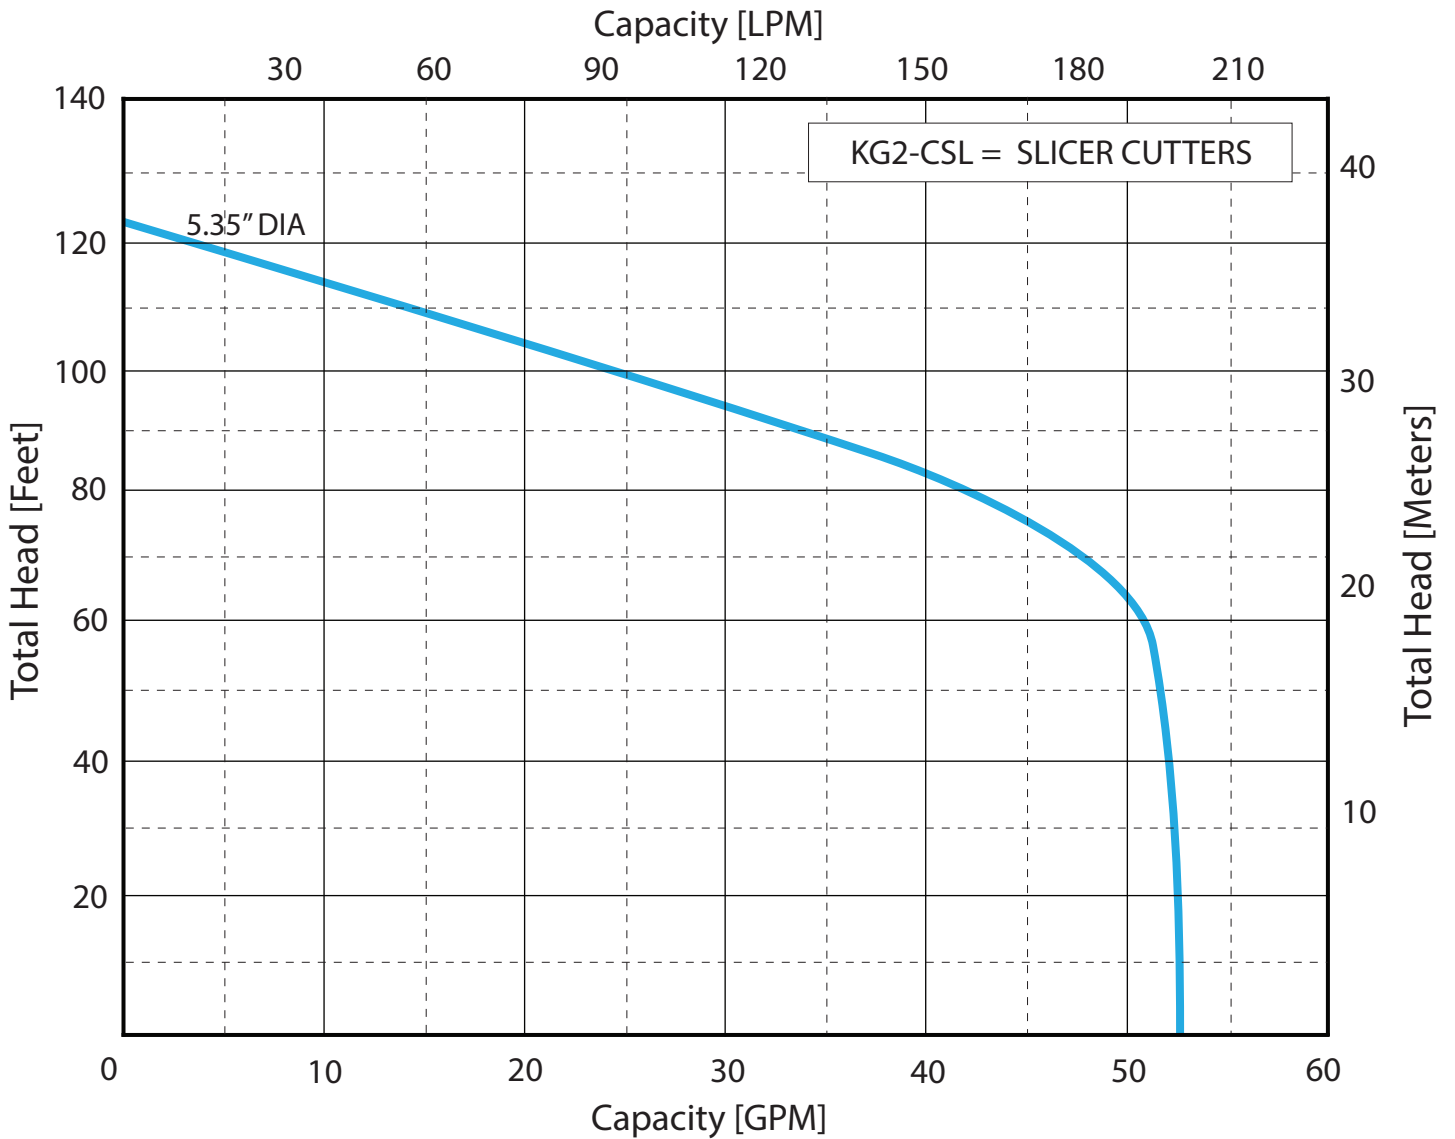

The curves reflect maximum performance characteristics without exceeding full load. Operation is recommended in the bounded area with operational point within the curve limit. Performance curves are based on actual tests with clear water at 70° F and 1280 feet site elevation.




Section
Date

GRINDER
MAR 2018

Pump Series	KG2C		2HP RECESSED IMPELLER (5.35" Dia.)	
Speed	3450 RPM	Discharge	1-1/4"	STANDARD FLOW

GPM: _____ TDH: _____

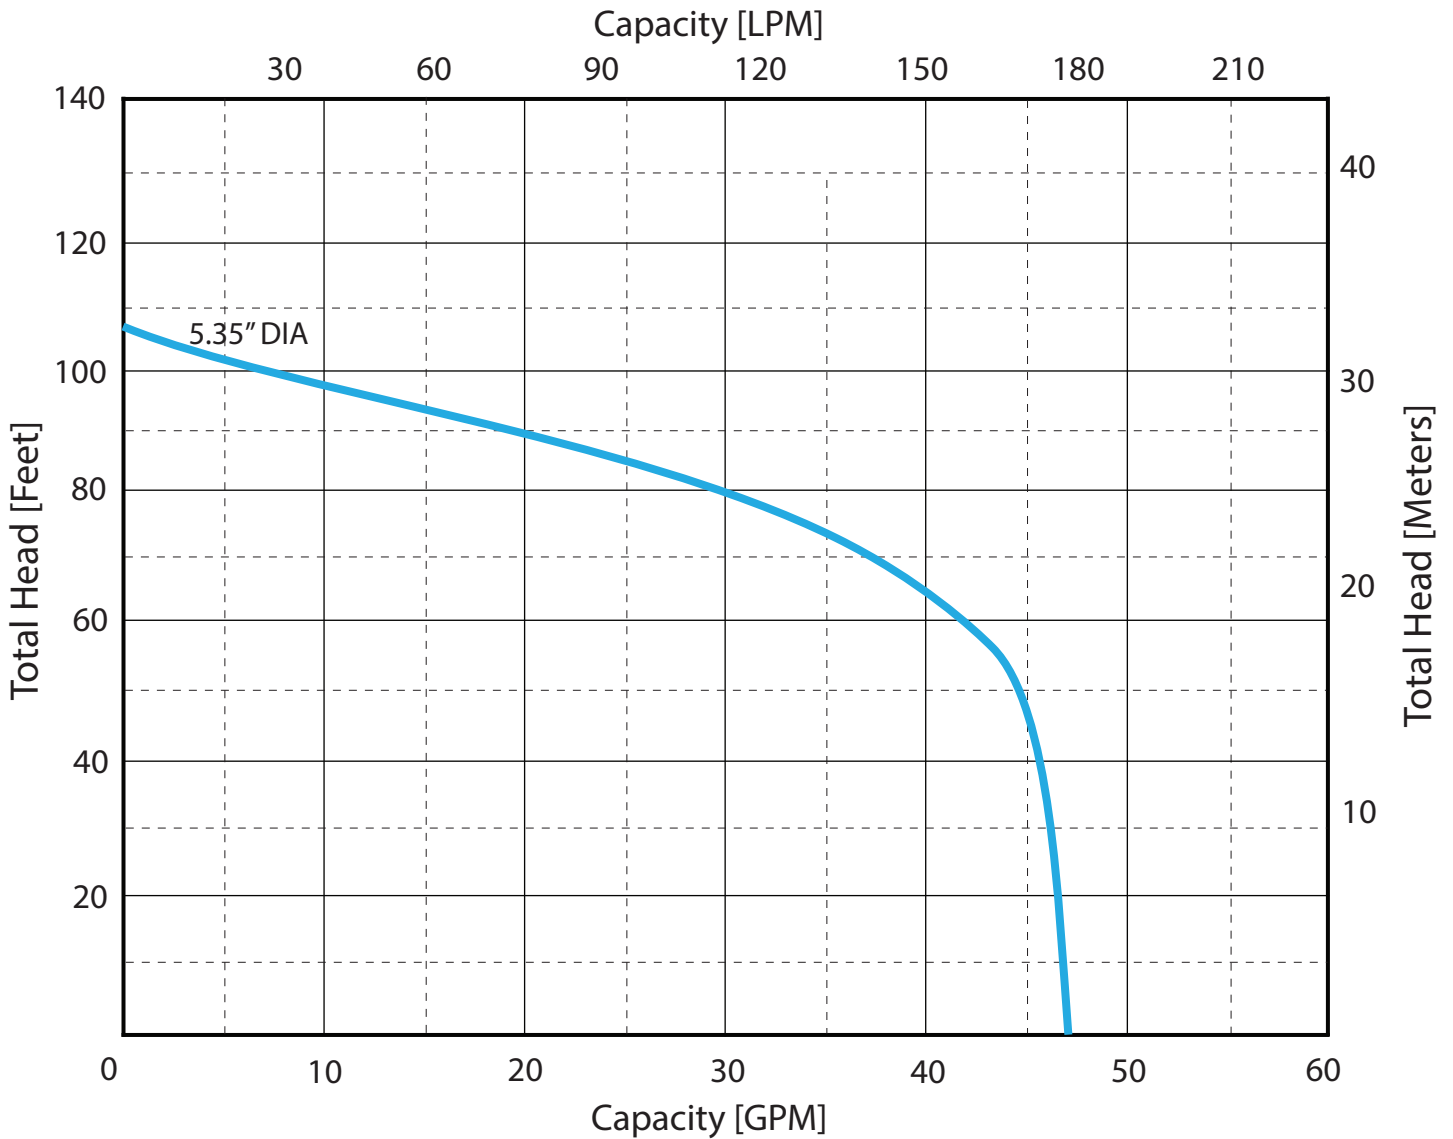

The curves reflect maximum performance characteristics without exceeding full load. Operation is recommended in the bounded area with operational point within the curve limit. Performance curves are based on actual tests with clear water at 70° F and 1280 feet site elevation.




Section
Date

GRINDER
MAR 2018

Pump Series	KG2		2HP RECESSED IMPELLER (5.35" Dia.)	
Speed	3450 RPM	Discharge	1-1/4"	STANDARD FLOW

GPM: _____ TDH: _____

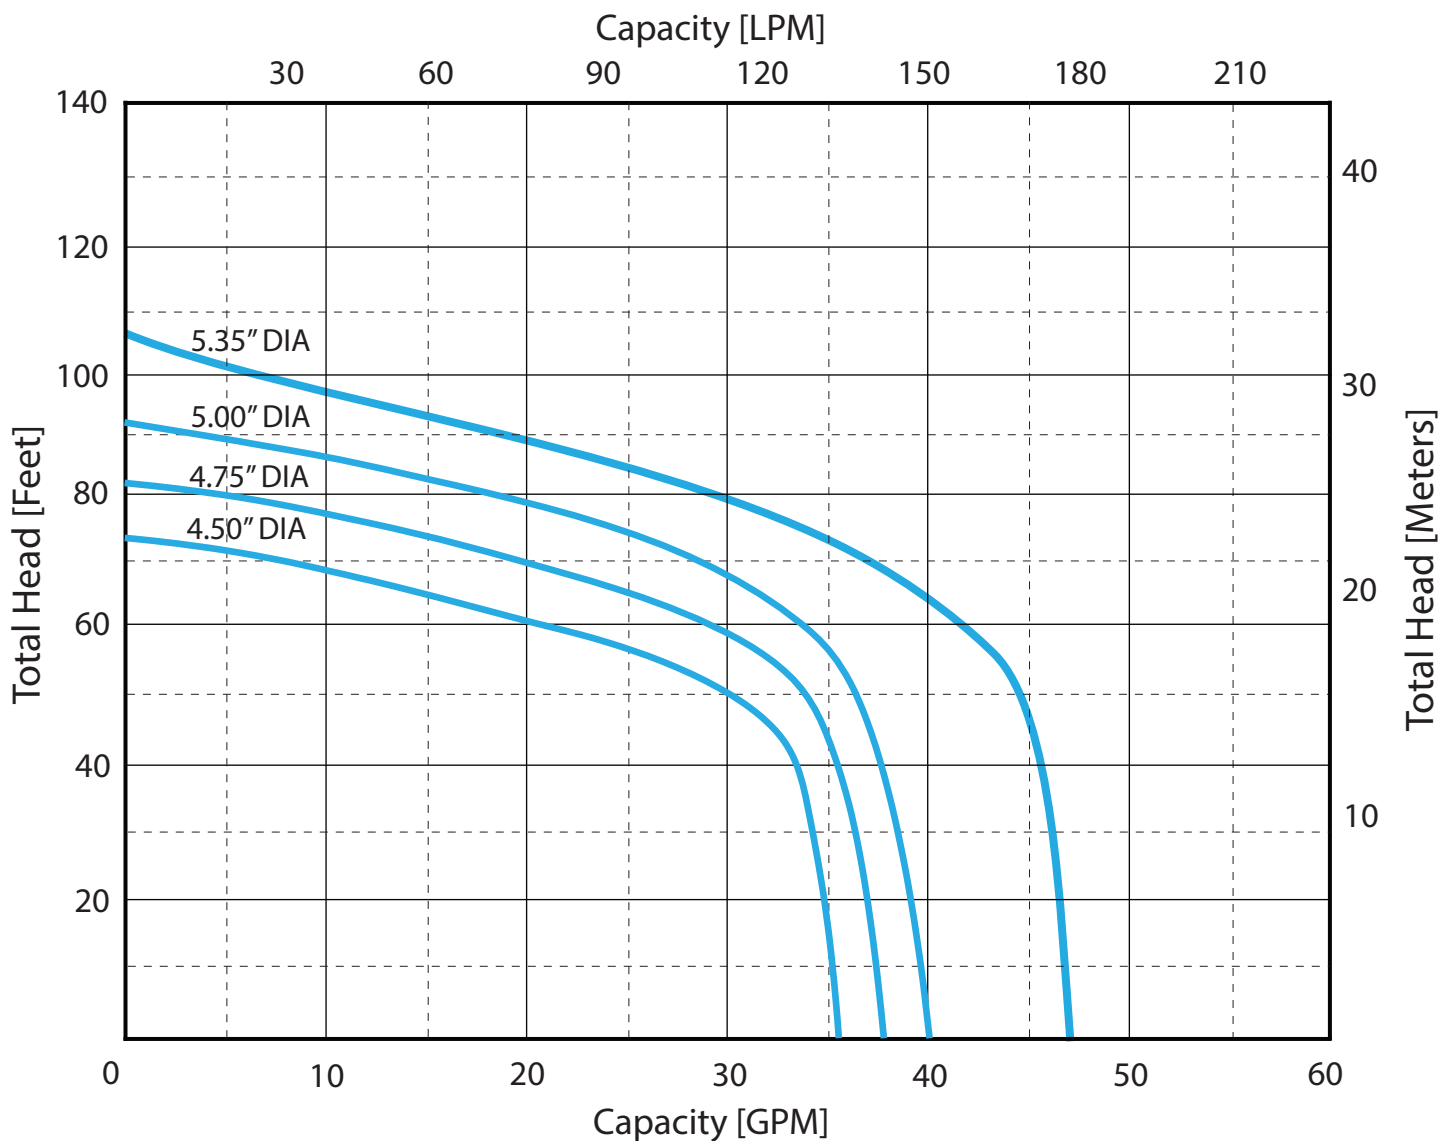

The curves reflect maximum performance characteristics without exceeding full load. Operation is recommended in the bounded area with operational point within the curve limit. Performance curves are based on actual tests with clear water at 70° F and 1280 feet site elevation.